



**INSTRUCTIONS FOR ASSEMBLY OF  
Niña, Chiquita and Mediana  
DOMETOP**




Unwrap and remove all parts from each box. Keep the box(es) and packing material until the cage is assembled. In case of return or exchange failure to return product in similar condition as received could result in limited reimbursement. Check to ensure you have all the following parts:

**Cage Parts (see numbered diagram)**

(1) MAIN BASE & 4 CASTERS	(7) BOTTOM TRAY
(2) FRONT PANEL (WITH DOOR)	(8,9) 4 SKIRTS (2 LONG, 2 SHORT)
(3) BACK PANEL	(10) PERCH
(4) 2 SIDE PANELS (WITH FOOD DOORS)	(11,12) 3 CUP HOLDERS AND CUPS
(5) DOME TOP	(13) 4 LATCHES
(6) BOTTOM GRATE	

**Cage Assembly (instruction numbers correspond with the attached numbered diagram):**

1. Place the MAIN BASE upside down and insert CASTERS into the legs (they can be installed using a rubber mallet on the metal stem, NOT on the rubber wheel).
2. Turn the MAIN BASE over and insert the FRONT PANEL over the pegs in the front of the BASE.
3. Insert the BACK PANEL over the pegs in the back of the BASE.
4. Slide the SIDE PANELS over the metal sleeve at the bottom of the FRONT and BACK PANELS and push into the slots at the top.
5. Insert the pegs attached to the DOMETOP into the holes on the top of the PANELS to hold all PANELS together.
6. If desired, slide the GRATE into the track just below the front door.
7. The TRAY can go in two positions: 1) If you do not want to use the grate, you may slide the tray into the track just below the front door; or 2) Position the tray just above the front crossbar, and ensure the tray edge is inside the track on each side of the cage.
8. Locate the pair of SEED GUARDS with PEGS and insert the pegs into the metal sleeves attached to the lower part of the cage.
9. Then nest the SEED GUARDS with flat TABS into the ones already on the cage.
10. Install the PERCH on the inside of the cage. The notches fit over the cage bars on each side.
11. With the feed doors open, insert the CUP HOLDERS into the tubes on the inside of the doors.
12. Insert a CUP into each of the CUP HOLDERS.
13. To install each LATCH, first remove the knob by unthreading it. Ensure the spring is placed over the round end of latch. Insert the assembly into the lock sleeve mounted onto the cage door so that the round end protrudes through the opposite end. Position the assembly so that the threaded hole is visible through the front of the latch and screw the knob through the lock sleeve into the threaded hole on the latch. Turn counter-clockwise to loosen and open the door. When securing the door, tighten in the opposite direction to go in to the "lock" position.

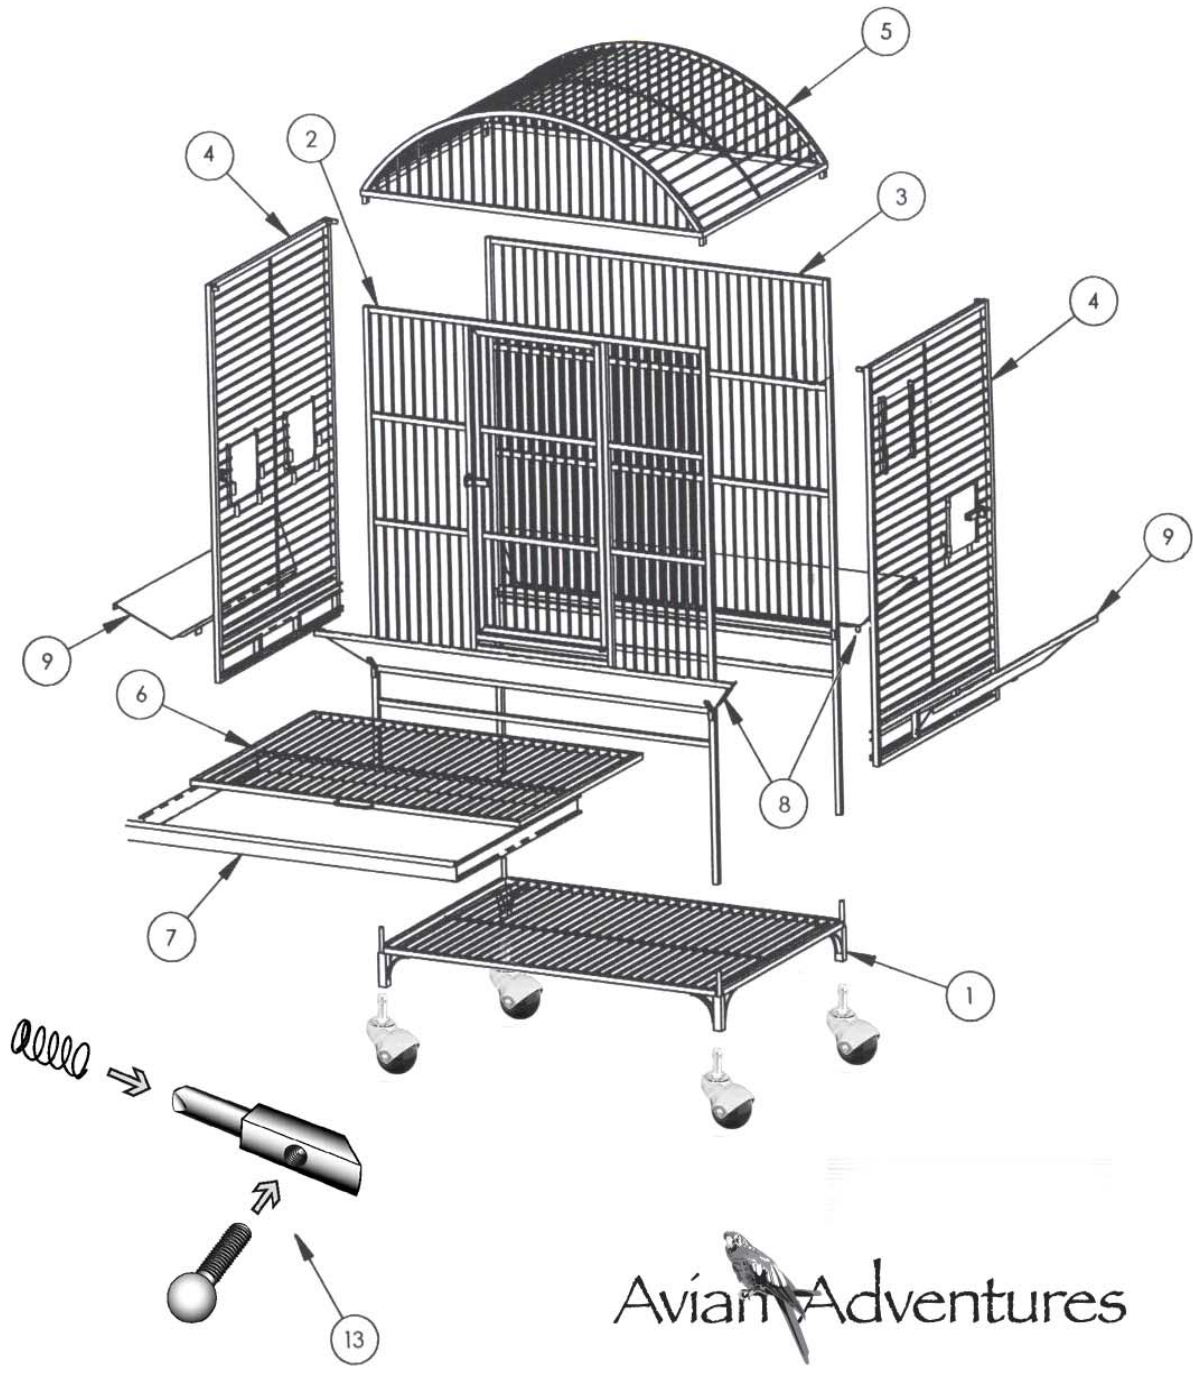

Please see our web site at <http://www.avianadventures.com> for a detailed video demonstration of how to assemble this cage.